

MAN-TRAP MANUAL

FULL HEIGHT CUBICLE



- With a wide variety of options, the Man-Trap is the perfect solution for controlling access to any building
- Designed and manufactured to provide a durable and aesthetic access control solution
- Exported worldwide



APPLICATIONS

- Suited for applications requiring medium volume access and high levels of security
- Used extensively at entrances to banks, retail stores, colleges, office blocks and commercial buildings

DESIGNED FOR

- Interior installations
- Demanding operating conditions

AVAILABLE CONFIGURATIONS

- Three sizes allowing for varying levels of security and comfort
- Single and double



UNIQUE FEATURES OF THE MAN-TRAP FULL HEIGHT CUBICLE

- Double door security
- Designed for integration with any access control system and for various double door operating configurations

RELIABLE TECHNOLOGY

- Direct pivot design ensures true door alignment and removes the need for clumsy, noisy hinges
- Steel frame structure and door, preventing sagging and door warping unlike aluminium doors which warp with use
- Stainless steel base bearings for longevity and corrosion resistance
- Heavy-duty hydraulic door closers
- Monitored magnetic locks
- Battery backup (optional extra)
- Infrared beam, dual occupancy presence sensors (optional extra)

DURABLE FEATURES

CONSTRUCTION

- Frame of powder coated mild steel (structured finish) or 304 grade brushed stainless steel
- 4.5mm 3Cr12 stainless steel base plate with heavy-duty rubberised floor
- Standard glazing of 6.38mm PVB laminated glass (bullet resistant glass available on request)
- Glass surrounds of anodised aluminium

DOOR COMPONENTS

- Heavy-duty transom hydraulic door closer
- Recessed 500kg monitored magnetic lock
- Mortice lock for night locking
- 304 grade brushed stainless steel pull handle

INDICATORS AND LIGHTING

- LED green and red indicator lights
- Low voltage ceiling downlighter

GUARANTEED MANUFACTURED TO LAST

- Zero maintenance
- 12 month guarantee

STAR QUALITIES



WELDED STEEL FRAME WITH ALUMINIUM AND GLASS INFILL



RECESSED 500KG MONITORED MAGNETIC LOCK



STAINLESS STEEL PULL HANDLE AND MORTICE LOCK



LED INDICATOR LIGHTS

TECHNICAL SPECIFICATIONS

POWER	220 Volt AC (110 Volt AC on request)
FREQUENCY	50Hz / 60Hz
POWER CONSUMPTION	<ul style="list-style-type: none"> 40W- Single Man-Trap 80W - Double Man-Trap
DIMENSIONS & WEIGHT	See overleaf
DESIGN	Modular bolt-together design for ease of transport and rapid installation. Components can pass through a standard door. Can be packed in broken-down form either onto a pallet or into a crate for transport. All glass is factory fitted into the steel and aluminium frames.
SYSTEMS INTEGRATION	<ul style="list-style-type: none"> Integrates with all access control and time and attendance systems (controlled through a normally open dry contact) Integral wireways – no exposed wires
FIRE ALARM	Fail-safe auto-unlock configuration
INSTALLATION REQUIREMENTS	<ul style="list-style-type: none"> Free standing structure which can be installed into a new or existing shopfront Fixing surface is to be level (tolerance +/- 5mm) Fixed to existing floor by means of four countersunk anchor bolts (M12 x 90)

MANUFACTURING OPTIONS

CONTROLLER OPTIONS	CBL01	Bi-directional two reader locking controller	Complete with	 Internal emergency pushbutton	 Presence sensors
	CBL02	Bi-directional two reader locking controller	Complete with	 Internal emergency pushbutton	 Presence sensors
	CBL03	Bi-directional single reader locking controller	Complete with	 Two external cycle start pushbuttons	 Presence sensors
	CBL04	Bi-directional single reader locking controller	Complete with	 Two external cycle start pushbuttons	 Presence sensors
	CBL05	Uni-directional bank locking controller			
	CBL07	High security bank locking controller	Complete with	 Status control panel	 Presence sensors
	DUAL OCCUPANCY	Infrared beam dual occupancy presence sensors (optional extra)			
POWER OPTIONS	Battery backup (optional extra)				
DOOR CLOSER OPTIONS	<ul style="list-style-type: none"> Non-hold open door closer (factory standard) Hold open door closer 				
ACCESSORY OPTIONS	<ul style="list-style-type: none"> Card / proximity reader mounting brackets Biometric / fingerprint reader mounting brackets Single pushbutton mounted in frame of cubicle or in plastic box Random search device 				
FINISH OPTIONS	<ul style="list-style-type: none"> Mild steel with UV resistant polyester exterior powder coat finish (structured black) ★ 304 grade brushed stainless steel 316 grade brushed stainless steel ★ other structured colours available on request 				

Automatic door operation is available. See the [MAN-TRAP Automatic Cubicle product brochure](#).

THE MULTIPLE OCCUPANCY PRESENCE SENSOR SYSTEM


The multiple occupancy presence system is a basic detection system incorporating a number of infrared beams installed along the sides of the product and utilising a simple algorithm to declare an entry valid or invalid.

The multiple occupancy system does not and cannot offer 100% validated access.


MAN-TRAP FULL HEIGHT CUBICLE RANGE

SINGLE

FRONT ELEVATION

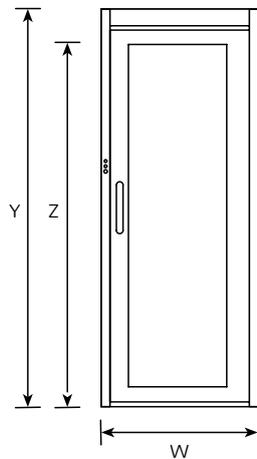

PLAN VIEW

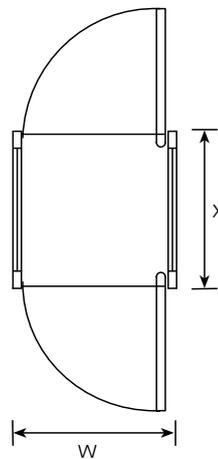


SPECIFICATION FOR ARCHITECTS AND SPECIFIERS

TURNSTAR MAN-TRAP manual security booth (CODE as per below table), of powder coated mild steel (structured black) / 304 grade brushed stainless steel, including CBL 01/2/3/4/5/6/7 controller, fixed to level floor by means of four M12 x 90 counter sunk anchor bolts.


Custom designs are available on request.

DOUBLE

FRONT ELEVATION

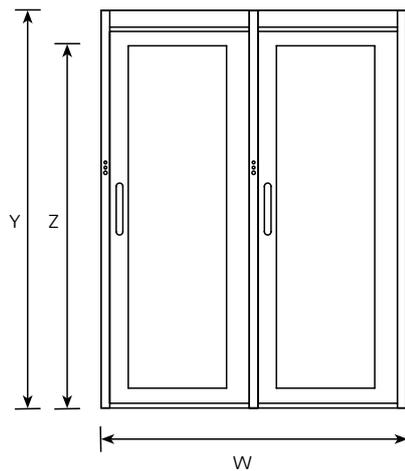

PLAN VIEW

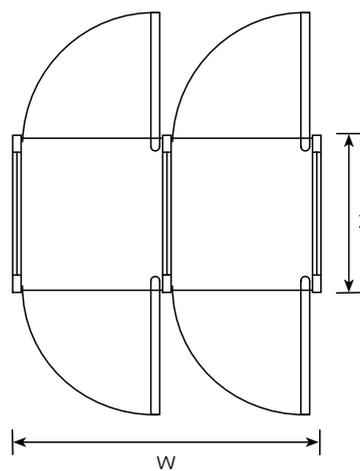

CODE	DESCRIPTION	WIDTH (W)	DEPTH (X)	HEIGHT (Y)	HEADROOM (Z)	WEIGHT (APPROX)
TSMT_SA	Single TURNSTAR MAN-TRAP manual cubicle (A)	800	700	2 300	2 100	250 kg
TSMT_SB	Single TURNSTAR MAN-TRAP manual cubicle (B)	900	900	2 300	2 100	280 kg
TSMT_SC	Single TURNSTAR MAN-TRAP manual cubicle (C)	1 000	1 400	2 300	2 100	390 kg
TSMT_DA	Double TURNSTAR MAN-TRAP manual cubicle (A)	1 550	700	2 300	2 100	480 kg
TSMT_DB	Double TURNSTAR MAN-TRAP manual cubicle (B)	1 750	900	2 300	2 100	520 kg
TSMT_DC	Double TURNSTAR MAN-TRAP manual cubicle (C)	1 950	1 400	2 300	2 100	700 kg

© Turnstar Systems

MANUFACTURER

EUROPEAN DISTRIBUTOR

PARTNER



JOHANNESBURG HEAD OFFICE
18 6th Street, Wynberg, Sandton, 2090
T: +27 (0)11 786 1633 | F: +27 (0)11 440 5839
E: info@turnstar.co.za | W: www.turnstar.co.za

DISTRIBUTED EXCLUSIVELY IN EUROPE BY GERAN
Butaanstraat 23, 7463 PG Rijssen
T: +31 (0) 548-543000 | F: +31 (0) 548-541130
W: www.geran-access.com