

## MAN-TRAP AUTOMATIC

## FULL HEIGHT CUBICLE



- With a wide variety of options, the Man-Trap is the perfect solution for controlling access to any building
- Designed and manufactured to provide a durable and aesthetic access control solution
- Both doors operate automatically and have built-in safety

### APPLICATIONS

- Suited for applications requiring medium volume access and high levels of security
- Used extensively at entrances to banks, retail stores, colleges, office blocks and commercial buildings

### DESIGNED FOR

- Interior installations
- Demanding operating conditions

### AVAILABLE CONFIGURATIONS

- Three sizes allowing for varying levels of security and comfort
- Single and double



# UNIQUE FEATURES OF THE MAN-TRAP FULL HEIGHT CUBICLE

- Double door security
- Designed for integration with any access control system and for various double door operating configurations

## RELIABLE TECHNOLOGY

- Direct pivot design ensures true door alignment and removes the need for clumsy, noisy hinges
- Steel frame structure and door, preventing sagging and door warping unlike aluminium doors which warp with use
- Stainless steel base bearings for longevity and corrosion resistance
- Automatic door operators with built-in safety
- Monitored strike pin locks
- Battery backup (optional extra) - the doors revert to manual hydraulic spring mode
- Infrared beam, dual occupancy presence sensors (optional extra)

## DURABLE FEATURES

### CONSTRUCTION

- Frame of powder coated mild steel (structured finish) or 304 grade brushed stainless steel
- 4.5mm 3Cr12 stainless steel base plate with heavy-duty non-slip rubberising
- Standard glazing of 6.38mm PVB laminated glass (bullet resistant glass available on request)
- Glass surrounds of anodised aluminium

### DOOR COMPONENTS

- Automatic door operator
- 200kg magnetic lock
- Mortice lock for night locking
- 304 grade brushed stainless steel pull handle

### INDICATORS AND LIGHTING

- LED green and red indicator lights
- Low voltage ceiling downlighter


## GUARANTEED MANUFACTURED TO LAST

- Zero maintenance
- 12 month guarantee


## STAR QUALITIES



WELDED STEEL FRAME WITH ALUMINIUM AND GLASS INFILL

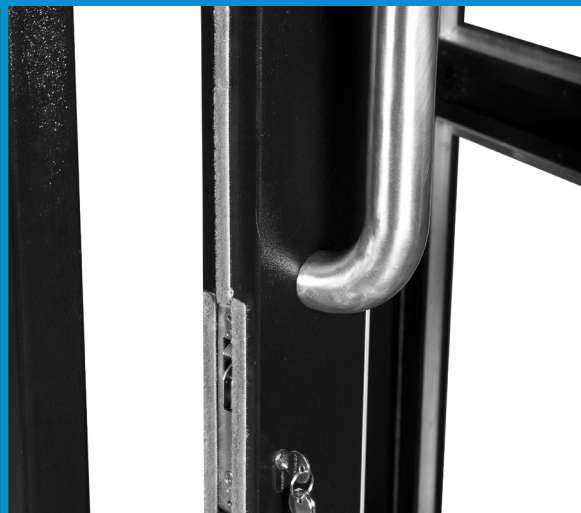

STAINLESS STEEL PULL HANDLE AND MORTICE LOCK

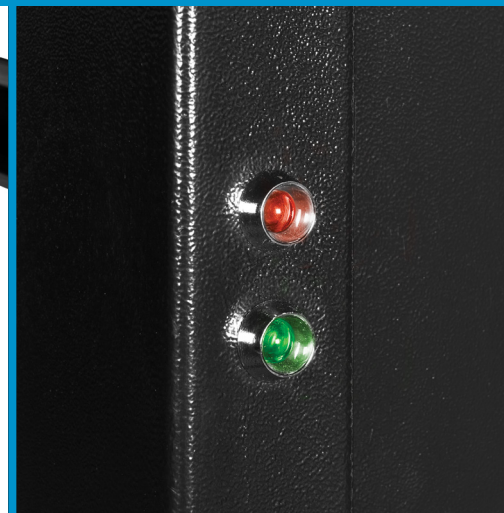









LED INDICATOR LIGHTS

# TECHNICAL SPECIFICATIONS

POWER	220 Volt AC (110 Volt AC on request)
FREQUENCY	50Hz / 60Hz
POWER CONSUMPTION	<ul style="list-style-type: none"> <li>80W standby - 110W operating (Single Man-Trap)</li> <li>160W standby - 220W operating (Double Man-Trap)</li> </ul>
DIMENSIONS & WEIGHT	See overleaf
DESIGN	Modular bolt-together design for ease of transport and rapid installation. Components can pass through a standard door. Can be packed in broken-down form either onto a pallet or into a crate for transport. All glass is factory fitted into the steel and aluminium frames.
SYSTEMS INTEGRATION	<ul style="list-style-type: none"> <li>Integrates with all access control and time and attendance systems (controlled through a normally open dry contact)</li> <li>Integral wireways – no exposed wires</li> </ul>
FIRE ALARM	Doors automatically open and remain open
INSTALLATION REQUIREMENTS	<ul style="list-style-type: none"> <li>Free standing structure which can be installed into a new or existing shopfront</li> <li>Fixing surface is to be level (tolerance +/- 5mm)</li> <li>Fixed to existing floor by means of four countersunk anchor bolts</li> </ul>

# MANUFACTURING OPTIONS

CONTROLLER OPTIONS	<b>CBL01A</b>	Bi-directional <b>two reader locking</b> controller	Complete with	 Internal emergency pushbutton	 Presence sensors
	<b>CBL02A</b>	Bi-directional <b>two reader locking</b> controller	Complete with	 Internal emergency pushbutton	 Presence sensors
	<b>CBL03A</b>	Bi-directional <b>single reader locking</b> controller	Complete with	 Two external cycle start pushbuttons	 Presence sensors
	<b>CBL04A</b>	Bi-directional <b>single reader locking</b> controller	Complete with	 Two external cycle start pushbuttons	 Presence sensors
DUAL OCCUPANCY	Infrared beam dual occupancy presence sensors (optional extra)				
POWER OPTIONS	Battery backup (optional extra)				
DOOR CLOSER OPTIONS FOR POWER FAILURE OPERATION	<ul style="list-style-type: none"> <li>Normally closed door closer (factory standard)</li> <li>Normally open door closer</li> </ul>				
ACCESSORY OPTIONS	<ul style="list-style-type: none"> <li>Card / proximity reader mounting brackets</li> <li>Biometric / fingerprint reader mounting brackets</li> <li>Single pushbutton mounted in frame of cubicle or in plastic box</li> <li>Random search device</li> </ul>				
FINISH OPTIONS	<ul style="list-style-type: none"> <li>Mild steel with UV resistant polyester exterior powder coat finish (structured black) ★</li> <li>304 grade brushed stainless steel</li> <li>316 grade brushed stainless steel</li> <li>★ other structured colours available on request</li> </ul>				



## THE MULTIPLE OCCUPANCY PRESENCE SENSOR SYSTEM

The multiple occupancy presence system is a basic detection system incorporating a number of infrared beams installed along the sides of the product and utilising a simple algorithm to declare an entry valid or invalid.

The multiple occupancy system does not and cannot offer 100% validated access.

# MAN-TRAP FULL HEIGHT CUBICLE RANGE

## SINGLE

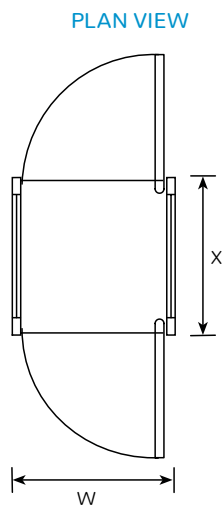
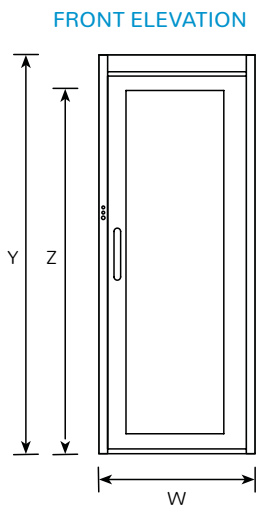


### SPECIFICATION FOR ARCHITECTS AND SPECIFIERS

TURNSTAR MAN-TRAP automatic cubicle (CODE as per below table), of powder coated mild steel (structured black) / 304 grade brushed stainless steel, including CBL 01/2/3/4/5/6/7 controller, fixed to level floor by means of four M12 x 90 counter sunk anchor bolts.

Custom designs are available on request.

## DOUBLE

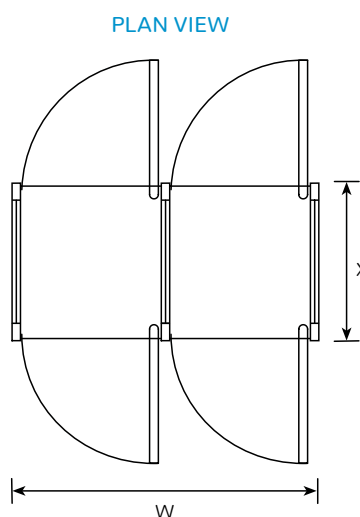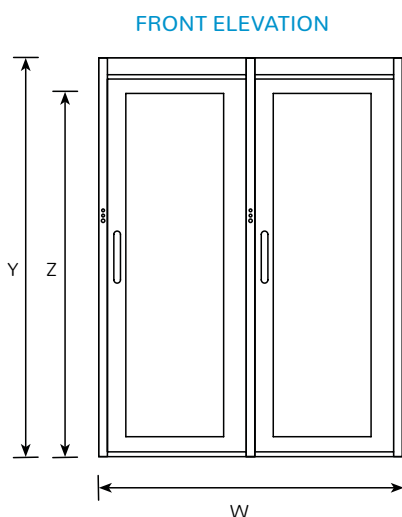

CODE	DESCRIPTION	WIDTH (W)	DEPTH (X)	HEIGHT (Y)	HEADROOM (Z)	WEIGHT (APPROX)
TSAT_SA	Single TURNSTAR MAN-TRAP automatic cubicle (A)	800	700	2 300	2 100	280 kg
TSAT_SB	Single TURNSTAR MAN-TRAP automatic cubicle (B)	900	900	2 300	2 100	310 kg
TSAT_SC	Single TURNSTAR MAN-TRAP automatic cubicle (C)	1 000	1 400	2 300	2 100	420 kg
TSAT_DA	Double TURNSTAR MAN-TRAP automatic cubicle (A)	1 550	700	2 300	2 100	510 kg
TSAT_DB	Double TURNSTAR MAN-TRAP automatic cubicle (B)	1 750	900	2 300	2 100	550 kg
TSAT_DC	Double TURNSTAR MAN-TRAP automatic cubicle (C)	1 950	1 400	2 300	2 100	730 kg

© Turnstar Systems

MANUFACTURER

EUROPEAN DISTRIBUTOR

PARTNER



JOHANNESBURG HEAD OFFICE  
18 6th Street, Wynberg, Sandton, 2090  
T: +27 (0)11 786 1633 | F: +27 (0)11 440 5839  
E: info@turnstar.co.za | W: www.turnstar.co.za

DISTRIBUTED EXCLUSIVELY IN EUROPE BY GERAN  
Butaanstraat 23, 7463 PG Rijssen  
T: +31 (0) 548-543000 | F: +31 (0) 548-541130  
W: www.geran-access.com